



atos®

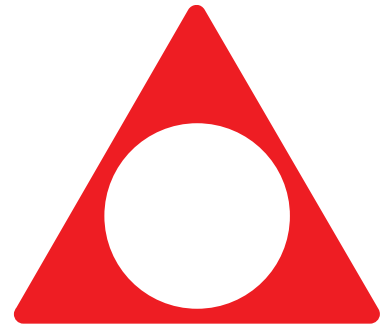

Distributed by Lynch Fluid Controls Inc.

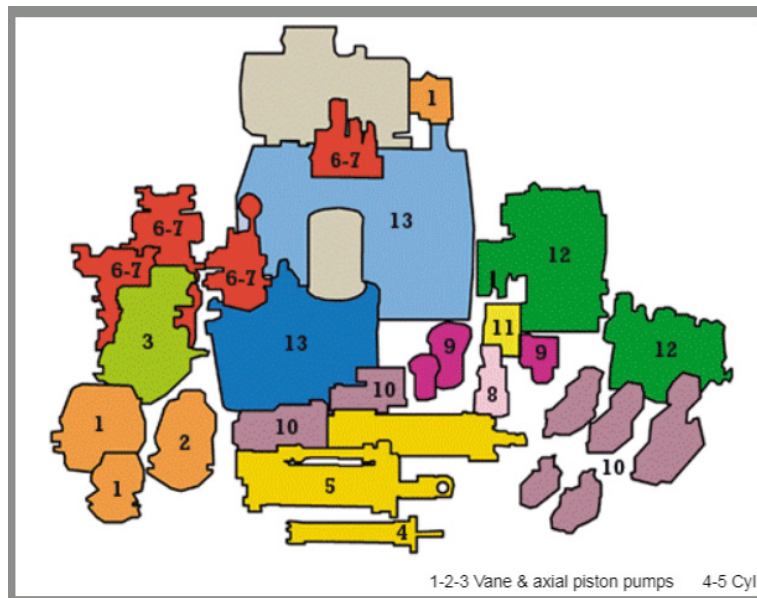

Toll Free
Tel: 1 (888) 626-4365
Fax: 1 (800) 263-5807

Local & International
Tel: +1 (905) 363-2400
Fax: +1 (905) 363-1191

Canada (Headquarters)
1799 Argentia Road
Mississauga, Ontario L5N 3A2

USA
3790 Commerce Court, Suite 500,
North Tonawanda, NY, 14120

On-Off Directional Controls

| Technical information | | Size | Max Flow 1/min | Table |
|---|--|----------------------------|---------------------------------|----------------------|
| Generality | user's guidelines for solenoid valves | | | E001 |
| Standard Solenoid Valves | | | | |
| DHI | Flanged solenoid, direct operated, spool type | 06 | 60 | E010 |
| DHE | Threaded solenoids, Direct operated, spool type | 06 | 80 | E015 |
| DKE | Threaded solenoids, Direct operated, spool type | 10 | 150 | E025 |
| DLEH DLEHM | Threaded solenoids, Direct operated, poppet type, leak free | 06 | 12 30 | E045 |
| DPH*-1 DPH*-2 DPH*-3 DPH*-6 | Double stage, spool type Flanged or threaded solenoids | 10 16 25 32 | 160 300 700 1000 | E085 |
| Special Executions Solenoid Valves | | | | |
| Hand lever | Emergency hand lever devices for solenoid valves, on-off and proportional | | | E138 |
| Mechanical, Hydraulic, Pneumatic Operated Valves | | | | |
| DH-00, DH-01, DH-02 | Mechanical, hand lever or cam operated valves ISO 4401 subplate mounting | 06 | 50 | E150 |
| DK-10, DK-11, DK-12 | | 10 | 100 140 | |
| DP-20, DP-21, DP-40, DP-41 | | 16, 25 | 300 650 | |
| DH-04,-05 DK-14,-15 DP-24, -25 DP-44, -45 DP-64, -65 | Hydraulic operated valves, single and double stage ISO 4401 subplate mounting | 06 10 16 25 32 | 50 160 300 700 1000 | E225 |
| DH-08,-09 DK-18,-19 DPH-28,-29 DPH-48,-49 DPH-68, -69 | Pneumatic operated valves, single and double stage ISO 4401 subplate mounting | 06 10 16 25 32 | 50 160 300 700 1000 | E255 |