


TYCO SUPERSEAL

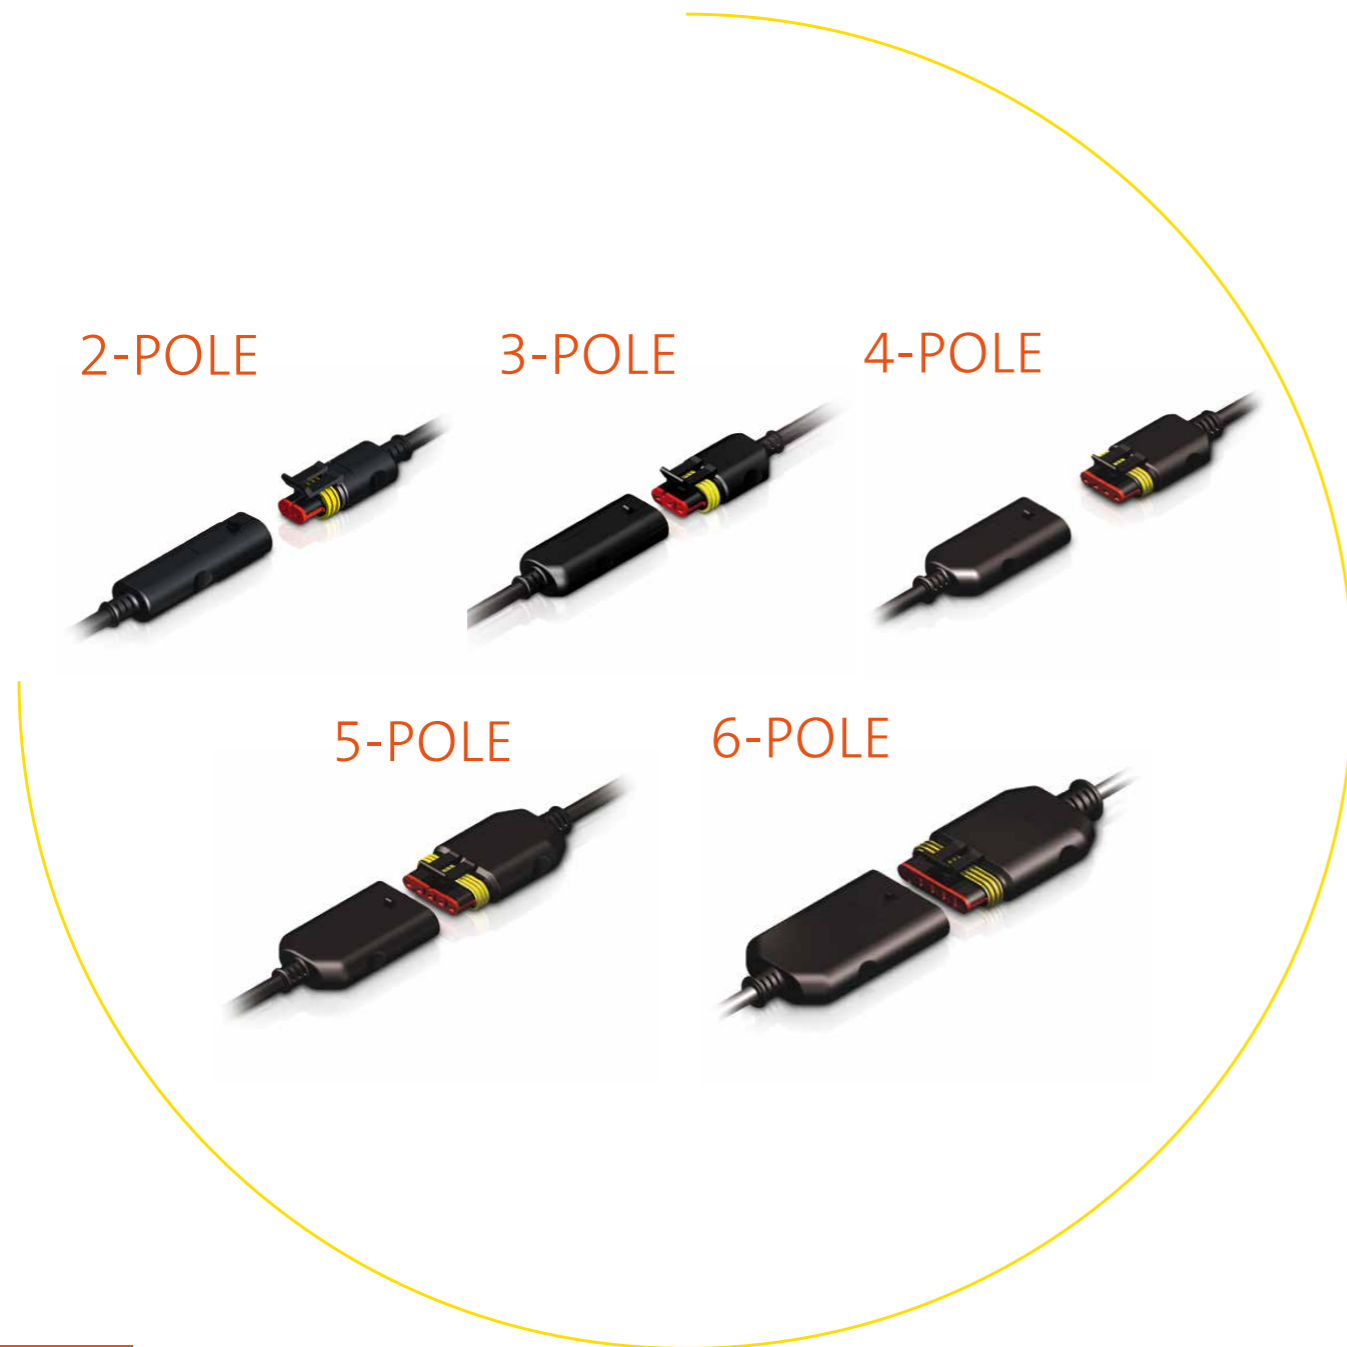

DETAILS

	2-Pole	3-Pole	4-Pole	5-Pole	6-Pole
Rated voltage	0 to 24 VDC	0 to 24 VDC	0 to 24 VDC	0 to 24 VDC	0 to 24 VDC
Operating current	11A	11A	11A	11A	11A
Cable	2 x 1.0 mm ²	3 x 1.0 mm ²	4 x 1.0 mm ²	5 x 1.0 mm ²	6 x 1.0 mm ²
Connector AMP SUPERSEAL	1.5 Series 2-pol.	1.5 Series 3-pol.	1.5 Series 4-pol.	1.5 Series 5-pol.	1.5 Series 6-pol.
Protection class	IP 67	IP 67	IP 67	IP 67	IP 67
Housing material	PA	PA	PA	PA	PA
Locking system	snap-lock	snap-lock	snap-lock	snap-lock	snap-lock
Temperature range	-20° C to +80° C	-20° C to +80° C	-20° C to +80° C	-20° C to +80° C	-20° C to +80° C

ORDER CODE TYCO SUPERSEAL

2-POLE/2-POLIG

Type/Ausführung	2 m	5 m	10 m
	Part No./Artikel Nr.	Part No./Artikel Nr.	Part No./Artikel Nr.
1 – Male/Stecker	932068	932069	932070
2 – Female/Buchse	932071	932072	932073

3-POLE/3-POLIG

Type/Ausführung	2 m	5 m	10 m
	Part No./Artikel Nr.	Part No./Artikel Nr.	Part No./Artikel Nr.
1 – Male/Stecker	932074	932075	932076
2 – Female/Buchse	932077	932078	932079

4-POLE/4-POLIG

Type/Ausführung	2 m	5 m	10 m
	Part No./Artikel Nr.	Part No./Artikel Nr.	Part No./Artikel Nr.
1 – Male/Stecker	932080	932081	932082
2 – Female/Buchse	932083	932084	932085

5-POLE/5-POLIG

Type/Ausführung	2 m	5 m	10 m
	Part No./Artikel Nr.	Part No./Artikel Nr.	Part No./Artikel Nr.
1 – Male/Stecker	932086	932087	932088
2 – Female/Buchse	932089	932090	932091

6-POLE/6-POLIG

Type/Ausführung	2 m	5 m	10 m
	Part No./Artikel Nr.	Part No./Artikel Nr.	Part No./Artikel Nr.
1 – Male/Stecker	932092	932093	932094
2 – Female/Buchse	932095	932096	932097